

Series RHPX

Passive and Active Temperature Outputs, Indoor and Outdoor Enclosures



Wall Mount with HDPE filter with shield



Wall Mount HDPE Filter



Wall Mount with Bronze Filter



Duct Mount



Large Enclosure with Heat Radiation Shield

Benefits/Features

- Reduced installation costs with multiple on-board sensors
- Minimal maintenance with UV rated outdoor enclosures
- UL 2043 compliant allows installation into the plenum space
- Easy installation with removable terminal block, attached lid, and cable management

Applications

- Air economizers
- Outdoor humidity and temperature reference
- Pool room humidity monitoring
- Building energy management systems
- Commercial HVAC systems
- Clean rooms
- Museums
- Data centers

Description

The **Series RHPX Humidity and Temperature Transmitter** accurately monitors the humidity and temperature for building control functions to maximize occupant comfort and minimize operating costs. Featuring capacitance polymer humidity sensors, models are available in 2% and 3% accuracies. An optional two-line alphanumeric LCD display is available. The high accuracy, long term stability and reliable operation in multiple enclosure styles make the Series RHPX an excellent choice for monitoring humidity and temperature in building energy management systems, commercial HVAC systems, clean rooms, museums and data centers. The Series RHPX can be optionally configured to supply absolute or relative humidity or dew point in addition to enthalpy.


Specifications

Humidity Measurement Range	0 % to 100 % humidity.
Temperature Measurement Range	-40 °C to 60 °C (-40 °F to 140 °F).
Humidity Sensor Accuracy	Model specific, ±2 % or ±3 %, at 10 % - 90 % RH and 25 °C (77 °F).
Temperature Sensor Accuracy, Solid State Band Gap	±0.9°F @ 77°F (±0.5°C @ 25°C).
Temperature Sensor Accuracy, Thermistor	±0.2°C @ 25°C (±0.36°F @ 77°F) (analog models only).
Temperature Sensor Accuracy, RTD	DIN Class B; ±0.3°C @ 0°C (±0.54°F @ 32°F) (analog models only).
Resolution	Relative humidity: 0.1%; temperature: 0.1°F/°C; absolute humidity: 0.1 g/m3.
Humidity Analog Output	4-20 mA or 0-5 V dc, 0-10 V dc at 5 mA max, field selectable.
Active Temperature Analog Output	4-20 mA or 0-5 V dc, 0-10 V dc at 5 mA max, field selectable.
Passive Temperature Sensors	Types II and III: Solid state band gap; Curves A, B, and F: Thermistor; Curves D and E: Platinum RTD DIN 385, Balco 1K (analog models only, availability is sensor configuration dependent).
Network Communication	BACnet MS/TP protocol or Modbus® RTU (communicating models only).
Supported BAUD Rates	9600, 19200, 38400, 57600, 76800, 115200 (communicating models only).
Termination Load	120 Ω (communicating models only).
Operating Temperature Range	-40°C to 60°C (-40°F to 140°F); With LCD: -20°C to 60°C (-4°F to 140°F).
Power Requirements	Communications model: 14 to 35 Vdc or 10 to 32 Vac; Analog model: 4-20 mA: 10 to 35 Vdc; Vout: 15 to 35 Vdc or 15 to 29 Vac.
Wiring Connection	Removable terminal block.
Electrical Entry	1/2" NPS thread. Cable gland included.
Humidity Sensor	Capacitive polymer.
Enclosure Material	UL 94 V-0.
Enclosure Rating	IP66.
Optional Display	Two (2) lines of alphanumeric characters with eight (8) characters per line.
Weight	Duct: 198.4 g (0.44 lb); wall mount: 170 g (0.38 lb); large housing: 340.2 g (0.75 lb); large housing with radiation shield: 1247.4 g (2.75 lb).
Storage Temperature	-40°C to 70°C (-40°F to 158°F); With LCD: -30°C to 70°C (-22°F to 158°F).
Additional calculations	Absolute humidity: (0 to 50) g/m3 or (0 to 3000) lb/mmcf; dew point -75 °C to 60 °C (-102 °F to 140 °F); enthalpy (-40 to 411) kJ/kg or (-17 to 177) Btu/lb.
Compliance	BTL, CE, UL 2043*, UL-60335-2-40**.


* UL 2043 compliance limited to models:
 RHPX-XS(B,S,W) Wall Mount
 RHPX-XS(D,E)-XX-X Plastic Probe Duct Mount without LCD
 RHPX-XS(F,G)-XX-X SSSL Duct Mount with LCD
 RHPX-XL(B,S,W) Large Wall Mount without LCD
 RHPX-XL(H) Large Wall Mount without LCD & Solar Radiation Shield

** Meets UL-60335-2 clause 30.103DV.1 through UL2043 compliance


Dimensions

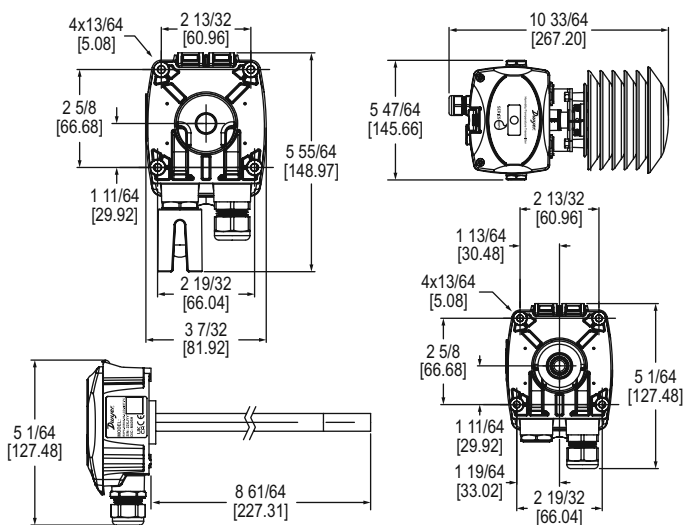

Wiring Diagram

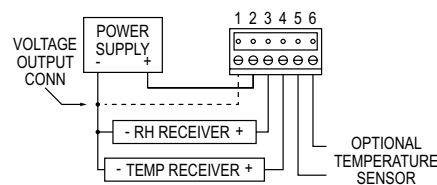

Analog Wiring Diagram

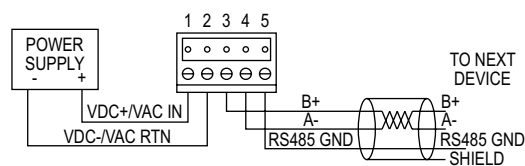

Communicating Wiring Diagram

How to Order

Use the **bold** characters from the chart below to construct a product code.

	RHPX	-2	S	B	A	0	-00	-LCD	
Series									Options
RHPX: Relative humidity/temperature transmitter									-LCD: LCD display
Accuracy									-NIST: NIST traceable calibration certificate
-2: 2 % RH accuracy									Cable Length
-3: 3 % RH accuracy									00: No cable
Enclosure									04: 1.2 m cable (4 ft) (-R model only)
S: Small enclosure									08: 2.4 m cable (8 ft) (-R model only)
L: Large enclosure									12: 3.6 m cable (12 ft) (-R model only)
RH Sensor Configuration									16: 4.9 m cable (16 ft) (-R model only)
B: Bronze sintered filter									Temperature Sensor - Passive
D: Duct mount with plenum plastic probe and hydrophobic filter									0: None
E: Duct mount with plenum plastic probe and rapid response filter									A: 10000 Ω at 25 °C thermistor type III
F: Duct mount with SSTL probe and hydrophobic filter									B: 10000 Ω at 25 °C thermistor type II
G: Duct mount with SSTL probe and rapid response filter									C: 1000 Ω Balco RTD
H: HDPE filter and solar radiation shield (factory installed)									D: 100 Ω RTD DIN 385
R: Remote humidity sensor									E: 1000 Ω RTD DIN 385
S: HDPE filter with cover									F: 20000 Ω at 25 °C thermistor
W: HDPE filter without cover									RH and Temperature Output - Active
									A: Selectable analog output
									C: BACnet MS/TP or Modbus® RTU communications

Accessories

Model	Description
RHRS	Six (6) plate solar radiation shield for sintered filter version
A-RHPX-PLATE	RHPX duct mount adapter plate to RHP duct mount
A-RHPX-DEPTH	RHPX duct mount depth adjustment bracket

Modbus® is a registered trademark of Schneider Electric USA, Inc.

©Copyright 2024 Dwyer Instruments, LLC
Printed in U.S.A. 3/24

DS-RHPX Rev.1

Important Notice: Dwyer Instruments, LLC reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.



Improving the world, one measurement at a time.™

