


FLOWMETER DIMENSIONS			
DIM.	RMA	RMB	RMC
A	4 9/16 [115.9]	8 1/2 [215.9]	15 1/8 [384.2]
B	3 [76.20]	6 7/16 [163.5]	12 1/4 [311.2]
	1/8 NPT CONN.	1/4 NPT CONN.	1/2 NPT CONN.
C	1 5/8 [41.28]	3 15/16 [100.0]	8 3/4 [222.3]
	10-32 MTG. HOLES	1/4-20 MTG. HOLES	3/8-24 MTG. HOLES
D	3/8 [9.525]	5/8 [15.88]	1 [25.40]
E	1 1/16 [26.99]	1 7/8 [47.63]	2 3/4 [69.85]
F	1 3/16 [30.16]	1 3/4 [44.45]	2 1/2 [63.50]
G	11/16 [17.46]	1 [25.40]	1 7/16 [36.51]
H	61/64 [24.21]	1 7/16 [36.51]	1 31/32 [50.00]
I	1 3/8 [34.92]	1 13/16 [46.04]	2 1/2 [63.50]
J	3/4 [19.05]	1 1/4 [31.75]	2 [50.80]
K	4 13/16 [122.2]	8 3/4 [222.3]	15 3/8 [390.5]
L	1 [25.40]	1 1/2 [38.10]	2 1/4 [57.15]

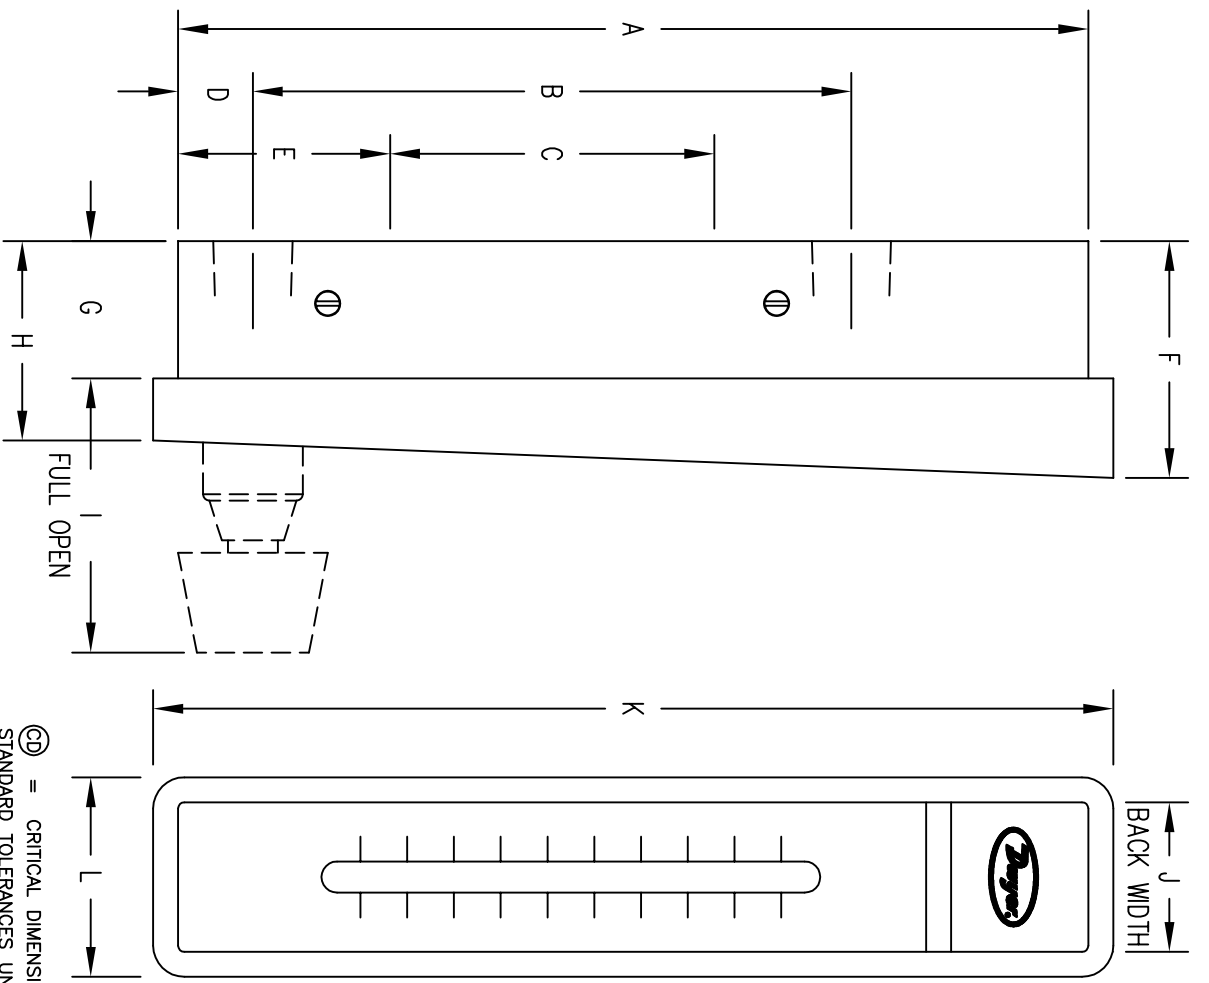

⊕ = CRITICAL DIMENSION  
 STANDARD TOLERANCES UNLESS NOTED:  
 ALL DECIMAL DIMENSIONS ± .005  
 ALL ANGLES ± 1°

NO.	CHANGES	BY/DATE	DATE	NAME	MATERIAL
				OUTLINE DIMENSIONS RMA, RMB, & RMC SERIES FLOWMETER	FINISH
					<b>Dwyer Instruments, Inc.</b> MICHIGAN CITY, INDIANA 46360 U.S.A.
					FR. NO.
					ACAD2002
					3

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.